

# 15RLFF Submittal

## AOU15RLFF, AGU15RLF Inverter Driven Heat Pump



Job Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted to: \_\_\_\_\_  
 Submitted by: \_\_\_\_\_  
 Reference: \_\_\_\_\_

Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Unit #: \_\_\_\_\_  
 Drawing #: \_\_\_\_\_

**Outdoor Unit Power** 208-230VAC-1Ph-60Hz  
 Available Voltage Range 187-253VAC  
 Fuse Size, Max. 20A  
 MCA 13.8A

**Compressor** Inverter Driven Variable Speed DC Rotary  
 No. used 1  
 Output 1000W  
 Lubrican Oil POE (RB68)

**Fan type** Propeller  
 Motor Output 115W  
 Airflow Rate Cooling/Heating (High) 1457 / 1207CFM

**Refrigerant** 410A  
 Outdoor Unit 2lbs 12oz  
 Control Electronic Expansion Valve  
 O.D. Discharge (in) 1/4"(Flare)  
 O.D Suction (in) 1/2"(Flare)

**Dimensions** H x W x D  
 Uncrated (in) 24-7/16 x 31-1/8 x 11-7/16  
 (mm) (620 x 790 x 290)  
 Crated (in) 28-1/16 x 37-3/16 x 15-9/16  
 (mm) (713 x 945 x 395)



**Weight** Outdoor  
 Net 84lbs (38kg)  
 Gross Shipping 95lbs (43kg)

**Cooling**  
 Rated Capacity 14,200BTU/h  
 Min-Max Capacity 3,100~17,700BTU/h  
 Rated Power Input 1.13kw  
 Max. Power Input 2.16kw  
 SEER 20.3  
 EER 12.5  
 Outdoor Sound Rating 54dB

**Heating**  
 Rated Capacity 18,000BTU/h  
 Min-Max Capacity 3,100~20,800BTU/h  
 Rated Power Input 1.58kw  
 Max. Power Input 3.30kw  
 HSPF 11.2  
 EER 12.5  
 Outdoor Sound Rating 54dB

**Piping Lengths**  
 Max. Piping Length (Total) 66ft  
 Max. Pipe Height Difference 49ft  
 Connection method (Flared)

**Operating Range**  
 Cooling 14°F~115°F DB  
 Heating -5°F~75°F DB

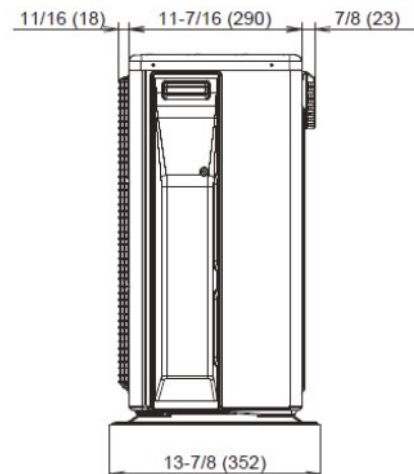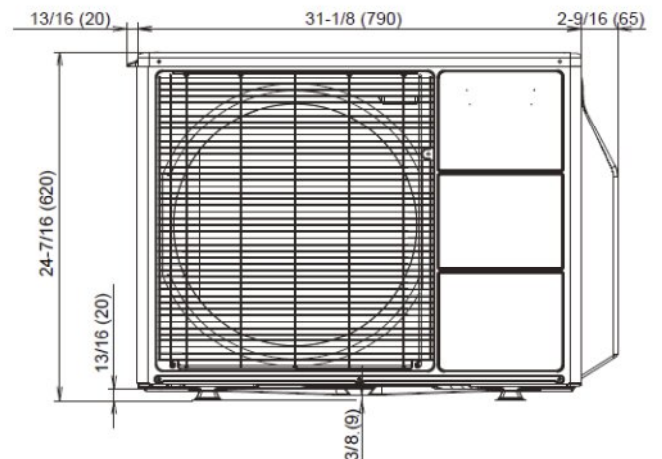

Fujitsu General America, Inc.  
 Fairfield, NJ 07004  
 Toll Free: 1-888-888-3424  
 Fax: (973) 836-0447  
 www.fujitsugeneral.com

Fujitsu products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations.

Note: Specifications are based on the following conditions.

Power source of specifications : 230V

Cooling: Indoor temperature of 80°F(26.67°C)DB / 67°F(19.44°C)WB, and outdoor temperature of 95°F(35°C)DB/75°F(23.89°C)WB.


Heating: Indoor temperature of 70°F(21.11°C)DB / 60°F(15.56°C)WB, and outdoor temperature of 47°F(8.33°C)DB/43°F(6.11°C)WB.

Pipe length : 24ft. 7in.(7.5m),Height difference : 0 ft.(0m) [Outdoor unit - Indoor unit]





<b>Indoor Unit Power</b>	208-230/VAC-1Ph-60Hz	
<b>Available Voltage Range</b>	187-253VAC	
<b>Fan type</b>	Cross flow	
<b>Motor Output</b>	32W	
<b>Motor Type</b>	E.C.M.	
<b>MCA</b>	0.7A	
<b>Sound Pressure Level</b>		
Cooling	Lo-Hi	23-44dB
Heating	Lo-Hi	23-43dB
<b>Airflow rate</b>		
Cooling	Lo-Hi	159-383CFM
Heating	Lo-Hi	159-383CFM
<b>Dimensions</b>	H x W x D	
Uncrated	(in)	23-5/8 x 29-1/8 x 7-7/8
	(mm)	(600 x 740 x 200)
Crated	(in)	27-9/16 x 32-5/16 x 12-3/16
	(mm)	(700 x 820 x 310)
<b>Weight</b>	Indoor	
Net	31lbs (14kg)	
Gross Shipping	37lbs (17kg)	

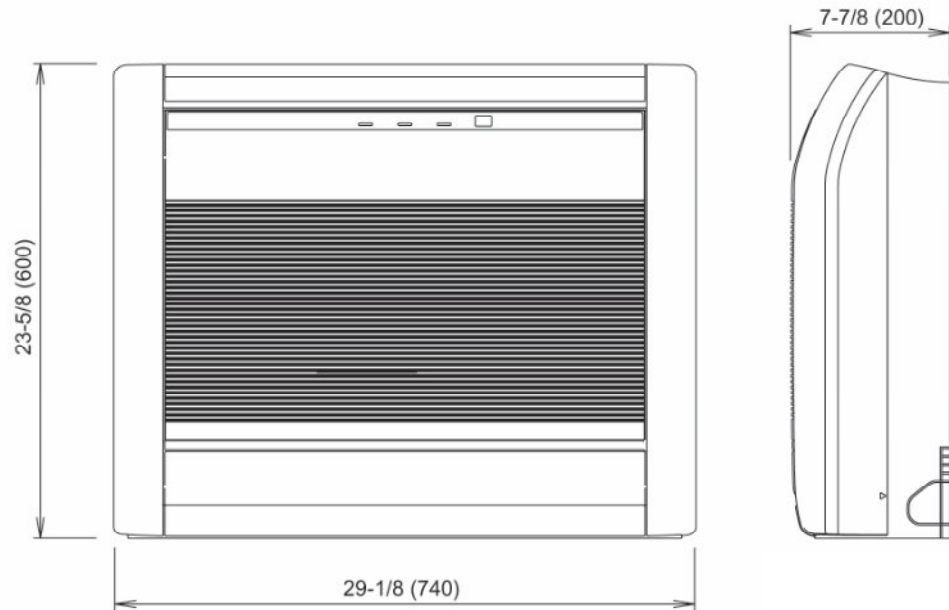

Fujitsu General America, Inc.  
 Fairfield, NJ 07004  
 Toll Free: 1-888-888-3424  
 Fax: (973) 836-0447  
 www.fujitsugeneral.com

Fujitsu products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations.

